




## RoLP SOLISTA LED

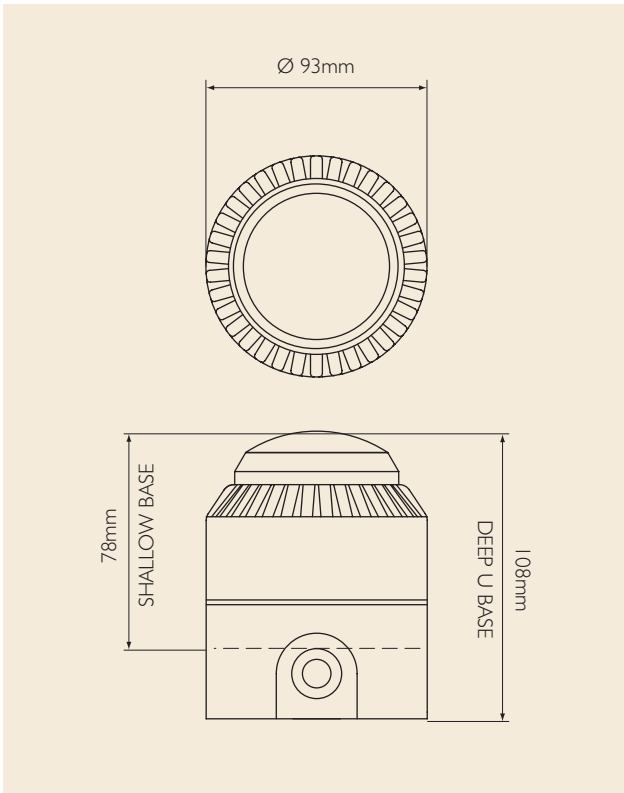

### Specification

Voltage	9 - 28Vdc (*1)	
Current	21mA (tone 3)	
Sound output	102dB(A) (tone 3)	
Tones	32	
Volume control	20dB	
Light source	LED	
Light output	>0.5Cd	
Flash rate	1Hz	
Flash colour	Red	
Monitoring	Reverse polarity	
Temperature	- 10°C to + 55°C	
Protection	IP54 Shallow base	IP65 Deep & U base
Construction	ABS FR, PC lens	
Weight	0.3Kg	
Colours	Red or white	

(\*1) 110 to 230Vac with powered base.

The use of beacons to supplement audible alarms is becoming increasingly common. A combined sounder beacon allows both an audible and visual alarm to be provided but requires only a single installation point. LED beacons have a dramatically lower current consumption than that of traditional xenon beacons making them ideal for applications where sounder circuit capacity is limited.

- ULTRA LOW CURRENT – LED TECHNOLOGY
- SOUNDER & BEACON WITH A SINGLE INSTALLATION POINT
- UNOBTRUSIVE LOW PROFILE DESIGN
- STANDARD FULLEON BASE SIMPLIFIES SYSTEM UPGRADES
- LOCKABLE BASE