

MA15 range

AC and DC power surge suppressor and filter

- 12kA surge protection and RFI filtering
- Protects panel loads up to 15 Amps in series, unlimited Amps in parallel
- Suitable for AC or DC application
- Thermal and short circuit protection
- LED status indication feature
- 10 year product warranty
- UL1449 3rd Edition



The MA15 range of surge protection devices protects electronic equipment and computer networks against the effects of 'noise pollution' induced in power supplies. MA15 units 'clean up' the effects of industrial noise and surges caused by lightning, switching devices, thyristor controls, transmission system overloads and power-factor correction circuits.

Industrial control systems utilizing programmable logic controllers (plc) and industrial computers are particularly vulnerable due to the aggressive electrical environments for which they are intended, such as process plants, factories and water treatment sites. Although industrial computers and plcs are designed to be rugged, the extra protection provided by the DIN rail mounting MA15 units is critical. Ideally suited for protecting panel mounted equipment and typically used in the controls section of a motor control centre (MCC), the MA15 range provides surge and RFI protected power.

With a unique 'three-stage' combination of protection elements, these units suppress conducted RFI and voltage surges. The circuit elements are first, surge clipping components to absorb transient surges that may otherwise damage equipment, second a filter to suppress noise in the system and third, 'ring' suppression. The third of these prevents surges causing the filter to 'ring' (oscillate) under low load conditions – an effect that actually accentuates interference in most commercially available filters.

Suitable for AC or DC application, MA15 units reduce both electromagnetic emissions and the susceptibility of the associated equipment to emissions from other sources. MA15 devices also offer ultimate installation flexibility. To protect circuits rated 15A or less, MA15 devices should be installed in series. To protect higher current circuits, simply install the MA15 in parallel.

An LED status indication facility is standard with the MA15 units. This displays both 'power on' and that protection is present. Thermal fusing is also incorporated into each 12kA rated device as an additional safety feature. MA15 units also offer short circuit protection for added peace of mind.

MA15 devices are UL 1449 Recognized Components (certified by UL for both US and Canadian requirements) and exceed the requirements of IEC 61000-4-5. As MA15 units suppress conducted RFI and voltage surges they enable associated equipment to comply with this aspect of European 'CE' mark standards.

MA15 range
AC and DC power surge
surpressor and filter
 September 2016

SPECIFICATION

All figures typical at 77°F (25°C) unless otherwise stated

- Maximum surge current**
4kA (8/20µs) per mode
- Maximum leakage current**
<0.3mA
- Maximum continuous operating current (UL-approved)**
120V @ 15A; 240V @ 10A series connection
Unlimited Amps in parallel
- Maximum continuous operating current (Non-approved)**
120V @ 15A; 240V @ 15A series connection
Unlimited Amps in parallel
- Working voltage**

	AC	DC
MA15/D/1/SI	120V, 47-63Hz	140V
MA15/D/1TT/SI	120V, 47-63Hz	140V
MA15/D/2/SI	240V, 47-63Hz	280V
MA15/D/2TT/L	240V, 47-63Hz	280V
- Maximum continuous operating voltage**
25% above nominal
- Limiting voltage**

@ 500A ring	120V/140V versions	295V
	240V/280V versions	356V
@ 500A 8/20µs	120V/140V versions	320V
	240V/280V versions	800V
@ 3kA 8/20µs	120V/140V versions	396V
	240V/280V versions	975V

- Maximum attenuation (typical)**
-55dB @ 100MHz
- Modes protected**
L-N, L-E, N-E
- Ambient temperature limits**
-40°F to +185°F (working)
-40°C to +85°C (working)
- Humidity**
95% RH (non-condensing)
- Casing**
Polymide-PA, with G- or T-section (Top-hat) DIN-rail mounting foot
UL94-V0

- Connectors**
Screw terminal
- Terminals**
0.1 inch² (2.5mm²) 12 AWG
- Mounting**
G- or T-section ('Top-hat') or 1.4 inch (35mm) DIN rail
- Weight**
3.53oz (100g)
- Dimensions**
See figure 1
- EMC compliance**
BS EN 61326-1 : 2006
IEC 61643-11 : 2011
- LED Indication**
Green LED on Protection present

DIMENSIONS

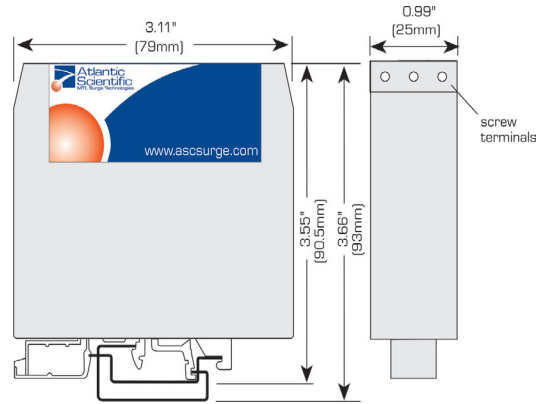


Figure 1 Dimensions

Installation

Typical wiring connections for MA15 range devices are indicated in figure 2. The grounding of the surge protector and the protected equipment is very important and, if possible, should be accomplished as illustrated.

Please note that the unit is marked Line and Load and it is important that the unit is installed with the Line side connected to the incoming power and the Load connected to the equipment to be protected. For parallel application however, the Line side is connected to the incoming power and the Load left unconnected.

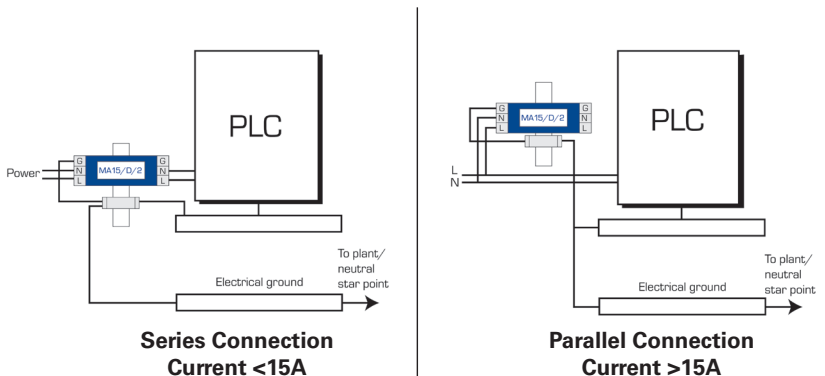


Figure 2 Installation

Approvals Green LED off Internal failure

Country	Standard/Authority	Approved for	Product
United States Canada	UL 1449 Recognized Component	AC Power Product	MA15/D/1/SI, MA15/D/2/SI
United States Canada	UL 1449 Recognized Component UL 1604	Hazardous Locations Class I, Division 2 Groups A, B, C and D	MA15/D/1/SI, MA15/D/2/SI

NOTE: The above approvals do not apply to the MA15/D/2TT/L and DC applications.



Eaton Electric Limited,
 Great Marlings, Butterfield, Luton
 Beds, LU2 8DL, UK.
 Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
 E-mail: mtlenquiry@eaton.com
 www.mtl-inst.com

© 2016 Eaton
 All Rights Reserved
 Publication No. EPS 901-108 Rev M 080916
 September 2016

EUROPE (EMEA):
 +44 (0)1582 723633
 mtlenquiry@eaton.com

THE AMERICAS:
 +1 800 835 7075
 mtl-us-info@eaton.com

ASIA-PACIFIC:
 +65 6 645 9888
 sales.mtl@eaton.com

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.