



RM-32WAY-24VDC RELAY MODULE

RM-32WAY-24VDC Relay Module

The relay module provides 32 relays, either mechanical 46.61-024-DC relays or SSR-EDxxC5 solid state relays. The relay module can be populated with a mixture of mechanical relays and solid state relays to suit the loads being switched.

Relay control is via a 40 way ribbon cable connected to a PLC.

There are terminals for an external 24V DC supply which will power the PLC interface to energise the relays.

Order code:



RM-32WAY-24VDC 32 way relay module.
Fitted with 46.61-024V-DC relays



Specifications

Outputs	32 relays with fuse holders Either 46.61-024-DC mechanical relays or SSR-EDxxC5 solid state relays * NOTE fuses not supplied with the unit 46.61-024-DC relays : 250VAC 10A CO (fuse/fuse holder limited) SSR-ED06C5 relays : 1-48Vdc 5A NO SSR-ED24C5 relays : 24-280Vac 5A NO
Supply Input (to drive PLC interface)	: 24V dc to supply external devices : 20mA/relay, 640mA with all 32 relays on
Relay Control	: 32 * +24V via a 40 way ribbon cable connector
Temperature	Operating : -10°C to +20°C to +50°C Storage : -20°C to +70°C
EMC Compliance	: AS/NZS 61000.6.3:2012
Housing	DIN rail mounted polyamide, flame retardant UL 94 V0.
Terminals	Spring steel clamp, tin plated copper alloy terminal : up to 1.5mm ² stranded conductor : wire stripping 9mm

Relay Output Configuration Mechanical Relays or Solid State Relays

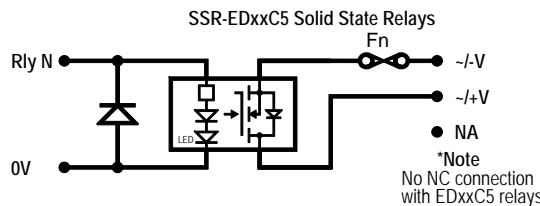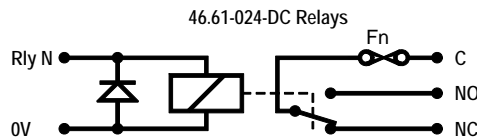

CARREL ELECTRADE LTD


MANUFACTURERS, IMPORTERS AND DISTRIBUTORS OF ELECTRICAL ENGINEERING PRODUCTS
 POSTAL ADDRESS: P O BOX 11078, ELLERSLIE 1542, AUCKLAND NEW ZEALAND
 FACTORY AND OFFICE: 661 GREAT SOUTH ROAD, PENROSE 1061
 TELEPHONE: +64-9-525 1753 FACSIMILE: +64-9-525 1756
 CHRISTCHURCH BRANCH: 73B BRISBANE STREET, SYDENHAM
 TELEPHONE: 03-366 1242 FACSIMILE: 03-379 1991
 EMAIL: sales@ carrel-electrade.co.nz WEB: www.carrel-electrade.co.nz





RM-32WAY-24VDC RELAY MODULE

Dimensions

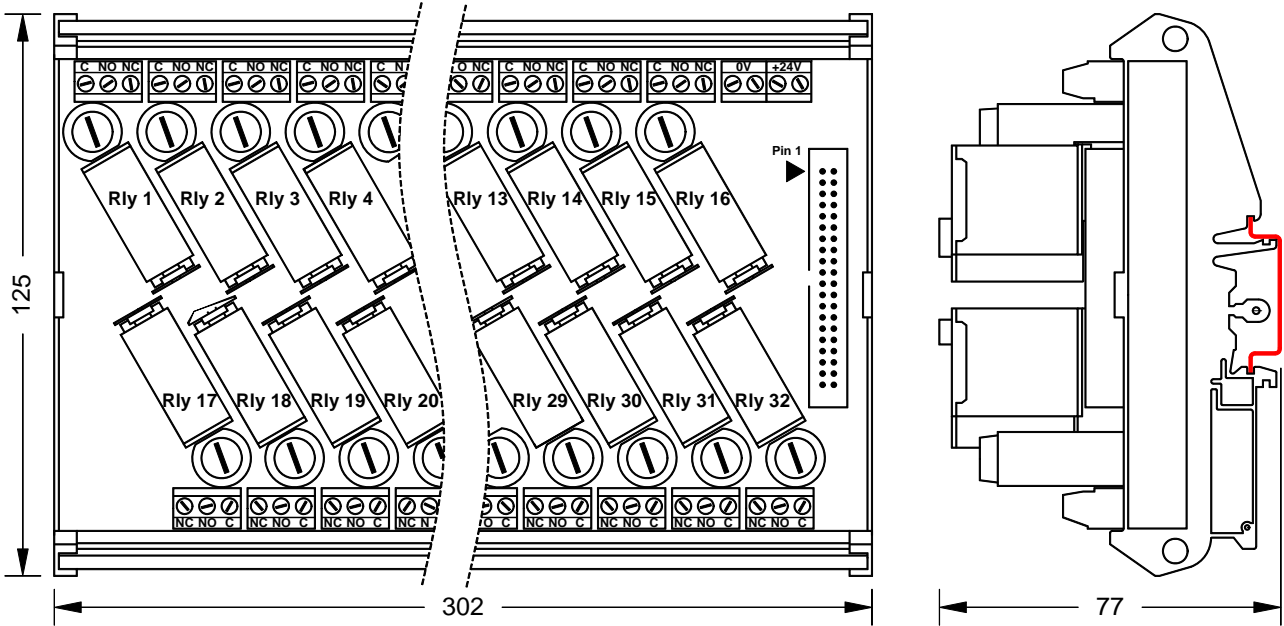

Circuit Diagram

