

MAGNETIC SAFETY SENSORS

MAGNUS MG MG M 20

Magnetic sensor. Robust thermoplastic enclosure (PTB) 30 mm diameter. IP67 rating.



Certifications:



Technical data:

Family	MAGNUS MG
Code	1291020
Connections	4 poles M8 connector
Degree of protection	IP 67
Operating temperature (°C)	From -25 to 75
Dimensions (mm)	M30 x 47
Connectable safety controllers	REER Mosaic/MGd1
Tamper protections	-
Contacts	2 N.O. contacts
Switching distance (mm)	4 ... 16 / 7 ... 20 (with magnet MG M M+)
Housing	Thermoplastic enclosure (PBT)

Accessories:


[CABLES C8 G3](#)
[CABLES C8 G93](#)
[CABLES C8 G5](#)
[CABLES C8 G95](#)

Related products:


[MOSAIC M1](#)
[MAGNUS MG MGd1](#)

See technical drawing in the next page.

Technical drawing:

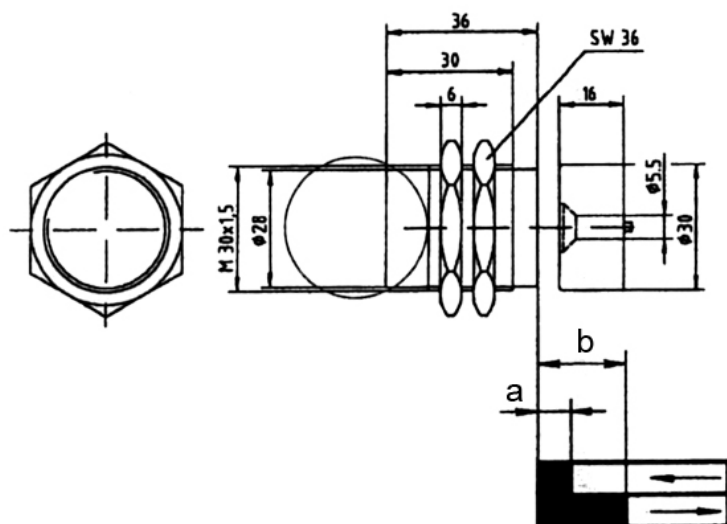

Distanza operativa
Operating distance
Min. 0,5 mm
with + Magnet 3 mm



ON 4 mm (a)
With + Magnet 7 mm

OFF 16 mm (b)
With + Magnet 20 mm

