

A comprehensive solution for industrial applications

ULTRASONIC SENSORS



Extract from our online catalogue:

mic+ ultrasonic sensors

Current to: 2013-07-30

*mic+ sensors are available
in four device designs
with five different
detection ranges*



Highlights

- **Digital display with direct measured value output in mm/cm or %** ::: *for immediately visible results*
- **Numeric configuration of the sensor using digital display** ::: *permits the complete advance configuration of the sensor*
- **Automatic synchronisation and multiplex operation** ::: *for simultaneous operation of up to ten Sensors in close quarters*

Basics

- **1 or 2 switching outputs in pnp or npn variants** ::: *for all controllers*
- **Analogue output 4–20 mA and 0–10 V** ::: *with automatic switching between current and voltage outputs*
- **Analogue output plus 1 pnp switching output** ::: *for proportional distance measurement with an additional limit value*
- **5 Detection ranges with a measurement range of 30 mm to 8 m** ::: *individually appropriate for the use case*
- **microsonic teach-in using T1 or T2 buttons** ::: *for simple, uniform commissioning*
- **0.025 mm to 0.18 mm resolution** ::: *for the highest precision possible*
- **Temperature compensation** ::: *for exact measurement in temperature fluctuations*
- **9–30 V operating voltage** ::: *for use on a variety of voltage networks*
- **LinkControl** ::: *for configuration of sensors from the PC*

Description

The mic+ sensor family

embedded in its M30 housing design covers a measuring range from 30 mm to 8 m with its five detection ranges. Depending on the detection range, the internal resolution for distance measurement is 0.025 or 0.18 mm. All sensors are equipped with an integrated temperature compensation.



TouchControl with LED Display (l.), Winding diameter measuring at the laminating machine (r.)

Four different output levels

are available for all five detection ranges:



1 switching output, optionally in pnp oder npn circuitry



2 switching output, optionally in pnp oder npn circuitry



1 analogue output 4-20 mA and 0-10 V



1 analogue output with an additional pnp switching output

With TouchControl

all sensor settings are made. The well readable LED display constantly shows the current distance value and automatically alternates between mm and cm indication. By operating the two keys beneath the LED display, the parameterisation is called up and the self-explanatory menu structure is run through.

The detect points of the switching outputs and the window limits for the analogue output can be pre-set numerically via the LED display without the object to be detected being positioned within the detection range. Therefore, it is possible to completely set the sensor without the help of auxiliary reflectors, even outside the actual application.

Zwo three-colour-LEDs

always indicate the current status of the switching outputs and/or the analogue output.

Further additional function (add-ons)

are available as an option within the TouchControl menu structure. The measured distance value may, e.g., be stressed by means of the tenstage software filter, from F0 (direct measuring value output without filtration) to F9 (extremely strong filtration and measuring value attenuation). A high measuring value attenuation is useful for filling level measuring operations with wave motions or in situations where parts may sporadically fly between the sensor and the actual measuring surface. The default filter value is F1. Thus, the sensors are preset for rapid counting and control operations. As further add-

ons, the default settings of the switching hysteresis of the switching outputs can be changed if required.
The LED display can be permanently switched off or dimmed.

Analogue sensors

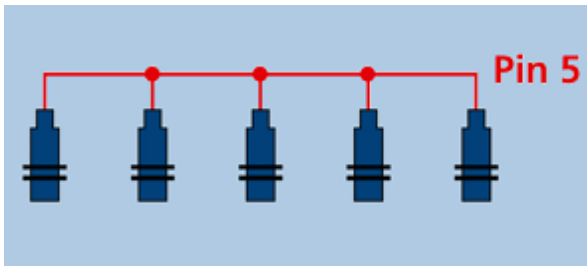
verify the load connected to the output and automatically switch to 4–20 mA current and 0–10 V voltage output in dependence of the resistance value. The load verification by the sensor is always initiated upon connection of the operating voltage.

In the add-on-menu of TouchControl, the user can, however, also pre-set the sensor to current or voltage output. In this menu, the measuring value output on the LED display with analogue sensors can additionally be changed to percentage indication. The window limits of the analogue characteristic curve then correspond to the 0% or the 100% value respectively.

Synchronisation

of up to 10 sensors automatically also operates in a mixed configuration of sensors with different detection ranges. The measurement repetition rate is then determined by the sensor with the largest detection range. If the sensors are electrically connected via pin 5 of the M12 circular connector, the synchronisation is active. In synchronised operation, all sensors initiate the measuring process at exactly the same time. With relatively narrow mounting distances between the sensors, a sensor may also receive echo signals from an adjacent sensor.

This can be used as an advantage, e.g. to broaden a sensor's detection range.



Synchronisation using Pin 5

If more than 10 sensors must be synchronised, this can be carried out with the SyncBox1, available as an accessory.

Multiplex operation

ensures that each sensor can only receive echo signals from its own transmission pulse, which completely avoids any interference between the sensors (crosstalk).

Each sensor is assigned an address from 0 to 9 for this purpose in the Add-on menu. The sensors then work in multiplex mode and carry out their measurements one after the other in ascending address order.

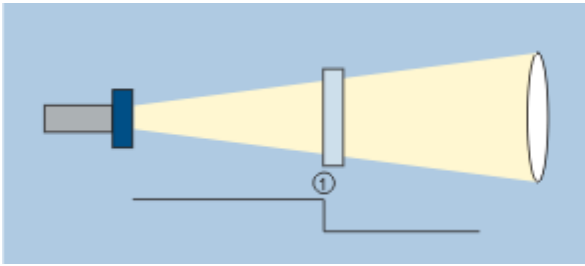
The setting of a switching or an analogue output

is either carried out by means of numerically entering the desired distance values (refer to graphic left below) or by means of a teach-in procedure (refer to this page).

Thanks to this, the user can select his preferred setting mode.

In the microsonic teach-in process

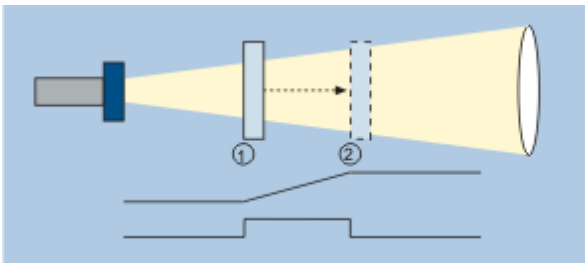
the object to be detected must be placed in the desired distance (1) to the sensor. The button assigned to the output must then be pressed until **TEACH d1** (or **TEACH d2**) appears on the LED display. Finally, the teach-in-procedure must be confirmed by a further short keystroke. Ready.



Teach-in of a detect point

For the setting of an analogue output, the object to be detected must first be placed on the sensor-close window limit (1) and the key assigned to the output must be pressed until **TEACH IU** appears on the display. Then, the object to be detected must be moved to the sensor-distant window limit (2) and the teach-in-procedure must be terminated by a further short keystroke. Ready.

For the setting of window mode with two switching points, the same procedure applies to one switching output.



Teach-in of an analogue characteristic curve or a window with two detect points

NCC/NOCC

for the switching outputs and rising/falling characteristic for the analogue sensors can also be set by means of the teach-in-procedure. For this, press the key assigned to output until the symbol $\overline{L}$ bzw. $\overline{U}$ appears on the display. With each further keystroke, the NCC/NOCC ($\overline{J}$ / $\overline{L}$) and rising/falling ($\overline{-}$ / $\overline{+}$) settings are alternated. After approx. 10 seconds, the new setting is automatically stored.

LinkControl

consists of the LinkControl adapter and the LinkControl software and facilitates the configuration of the mic+ sensors via a PC or laptop with all conventional Windows operating systems. All settings of the TouchControl menu can be read out during operation, edited on the PC, buffered and re-entered into the sensor.

Especially the two measuring value plotters for the visualisation of distance values support the development of solutions for complex automation tasks (also refer to chapter Accessories).




Sensor connected to the PC via LCA-2 for programming

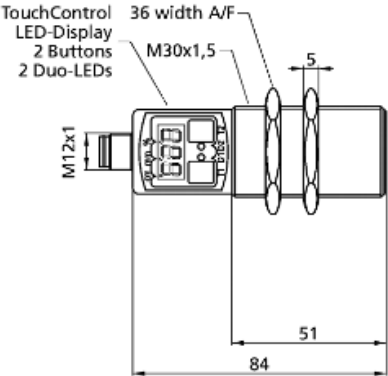
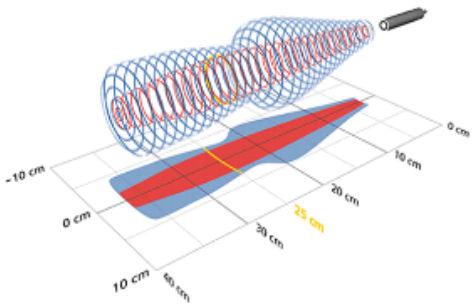
Pin assignment

PIN							COLOUR CODE OF SENSOR CABLE
	PNP	NPN	PNP	NPN	ANALOGUE OUTPUT	1 PNP OUTP. + ANALOGUE	
1	+U _B	+U _B	+U _B	+U _B	+U _B	+U _B	brown
3	-U _B	-U _B	-U _B	-U _B	-U _B	-U _B	blue
4	D	E	D2	E2	-	D	black
2	-	-	D1	E1	IU	IU	white
5	COM	COM	COM	COM	COM	COM	grey

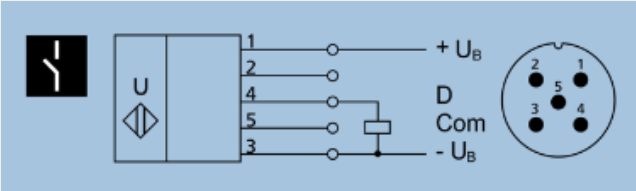
View on connector



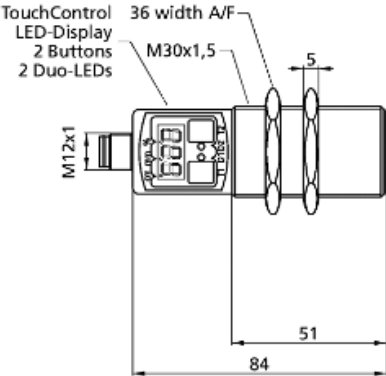
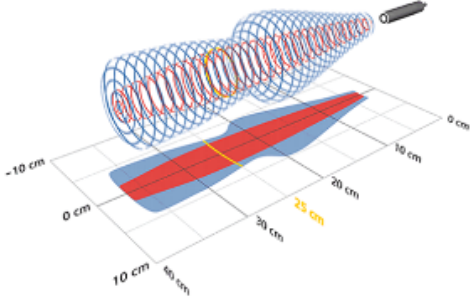
mic+25/D/TC

scale drawing	detection zone
	
 1 x pnp	 350 mm
operating range	30 - 250 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

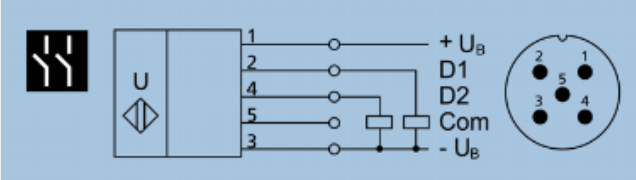
mic+25/D/TC

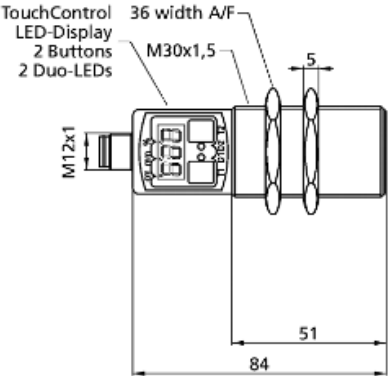
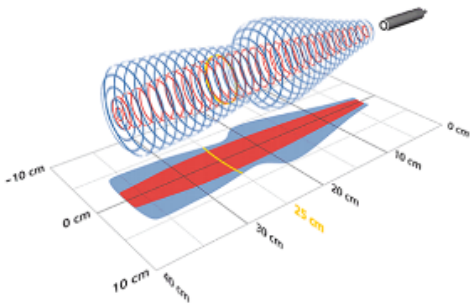
outputs	
output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+25/D/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

mic+25/DD/TC

scale drawing	detection zone
	
 2 x pnp	 350 mm
operating range	30 - 250 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+25/DD/TC

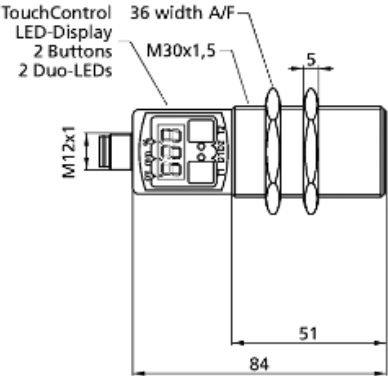
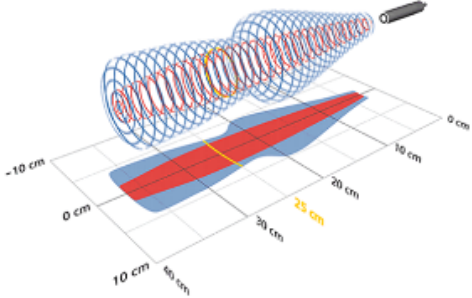
outputs	
output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+25/DD/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

scale drawing	detection zone
	
 1 x analogue 4-20 mA + 0-10 V	 350 mm
operating range	30 - 250 mm
design	cylindrical M30
operating mode	analogue distance measurements
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

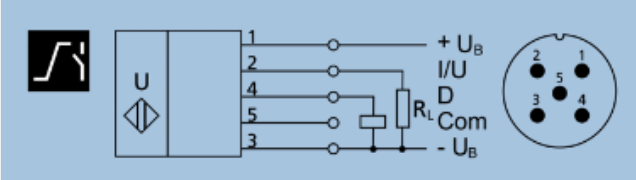
mic+25/IU/TC

outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B = 15$ V), short-circuit-proof switchable rising/falling
response time	32 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+25/IU/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

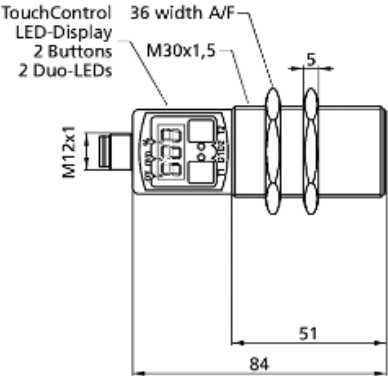
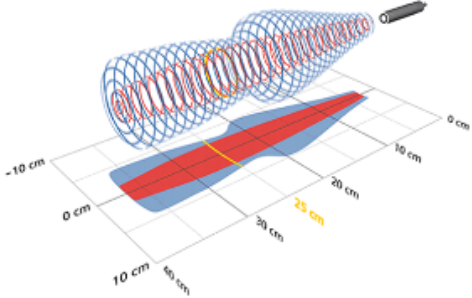
mic+25/DIU/TC

scale drawing	detection zone
	
 1 x pnp + 1 x analogue 4-20 mA / 0-10 V	 350 mm
operating range	30 - 250 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

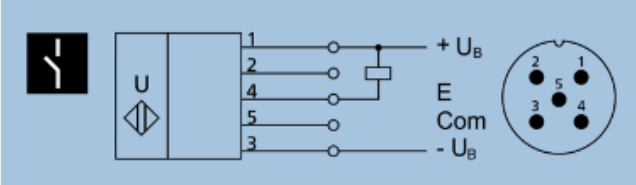
mic+25/DIU/TC

outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B = 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ($U_B - 2$ V) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+25/DIU/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

mic+25/E/TC

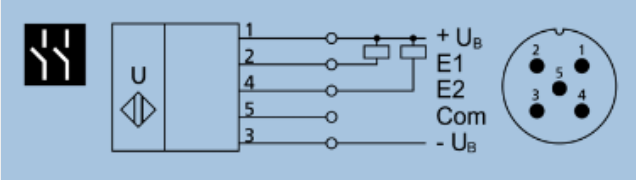
scale drawing	detection zone
	
 1 x npn	 350 mm
operating range	30 - 250 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+25/E/TC

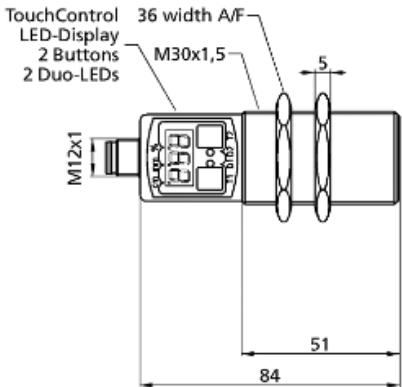
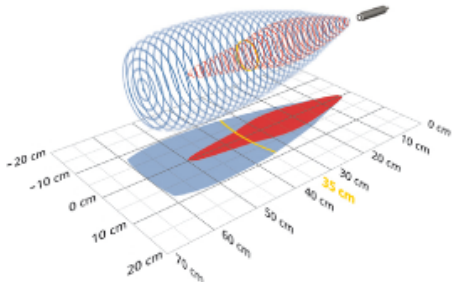
outputs	
output 1	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

scale drawing	detection zone
 2 x npn	 350 mm
operating range	30 - 250 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+25/EE/TC

outputs	
output 1	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

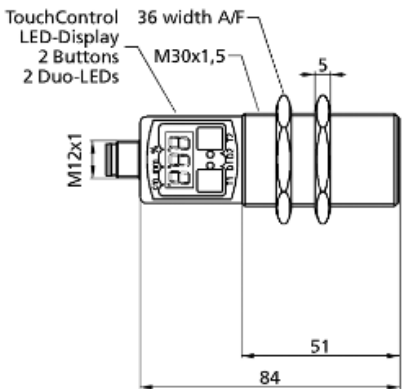
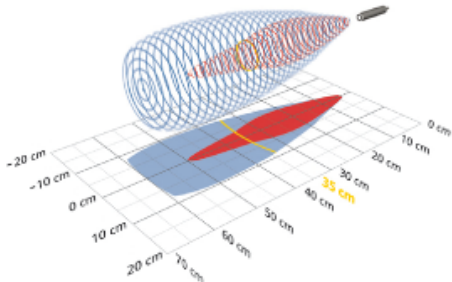
mic+35/D/TC

scale drawing	detection zone
	
 1 x pnp	 600 mm
operating range	65 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

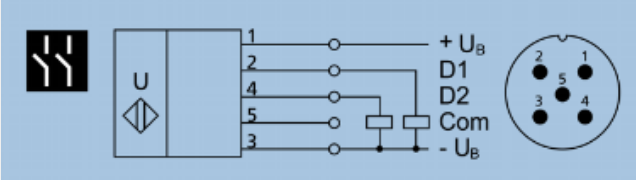
mic+35/D/TC

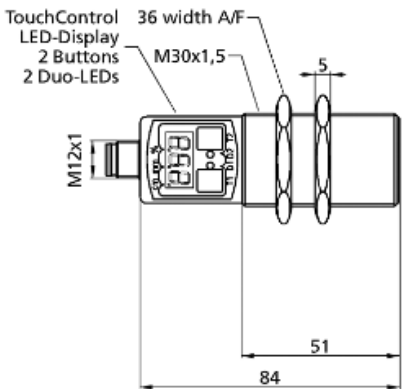
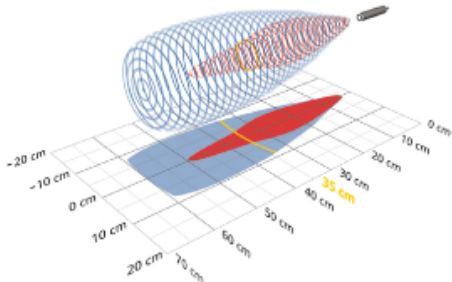
outputs	
output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	70 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+35/D/TC/E mic+35/D/TC/K6
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

mic+35/DD/TC

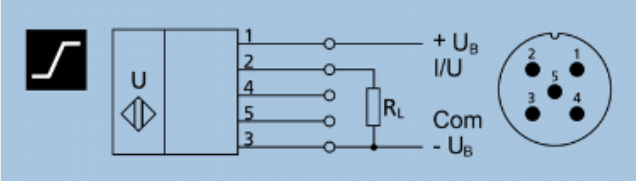
scale drawing	detection zone
	
 2 x pnp	 600 mm
operating range	65 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+35/DD/TC

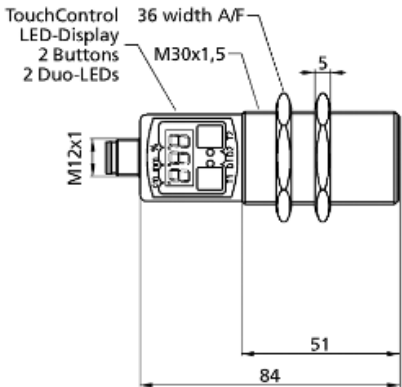
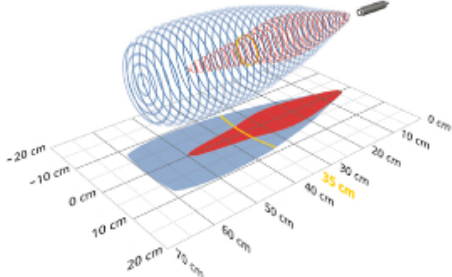
outputs	
output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	70 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+35/DD/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

scale drawing	detection zone
	
 1 x analogue 4-20 mA + 0-10 V	 600 mm
operating range	65 - 350 mm
design	cylindrical M30
operating mode	analogue distance measurements
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

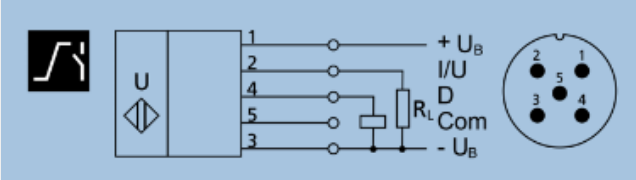
mic+35/IU/TC

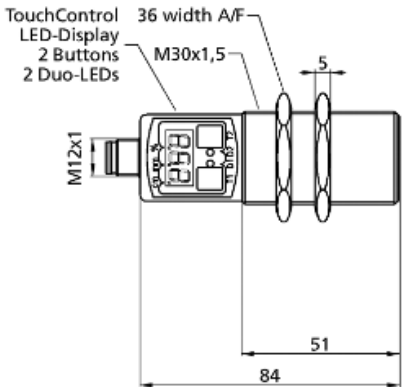
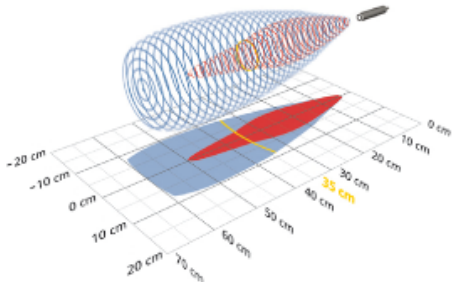
outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B = 15$ V), short-circuit-proof switchable rising/falling
response time	70 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+35/IU/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

mic+35/DIU/TC

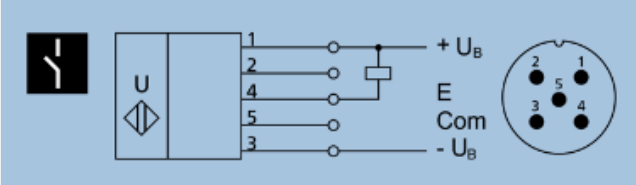
scale drawing	detection zone
	
 1 x pnp + 1 x analogue 4-20 mA / 0-10 V	 600 mm
operating range	65 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

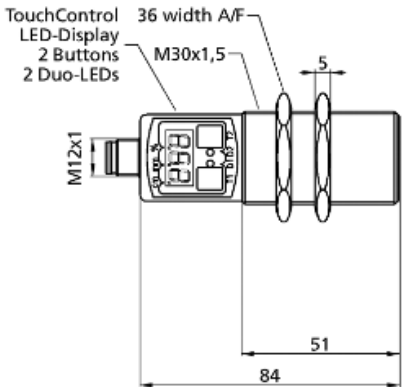
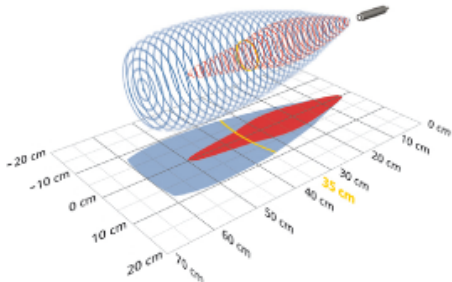
mic+35/DIU/TC

outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B = 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ($U_B - 2$ V) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	70 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+35/DIU/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

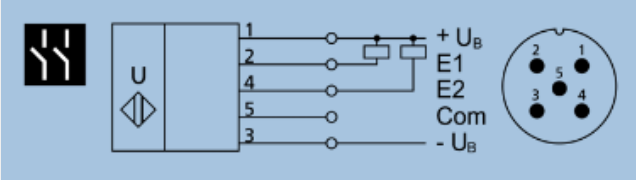
scale drawing	detection zone
	
 1 x npn	 600 mm
operating range	65 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+35/E/TC

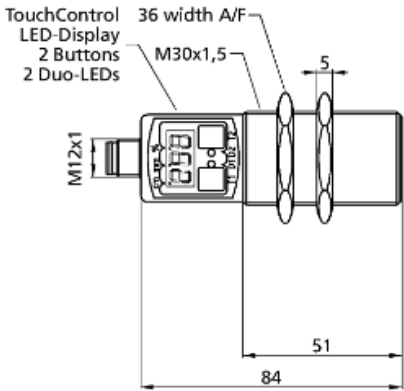
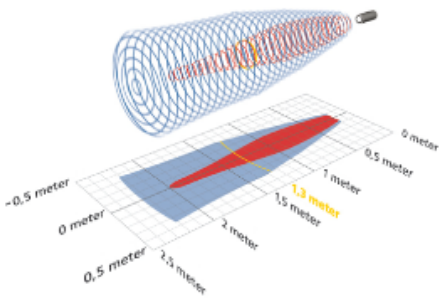
outputs	
output 1	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	70 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

scale drawing	detection zone
	
 2 x npn	 600 mm
operating range	65 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

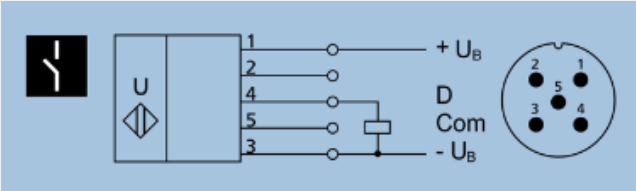
mic+35/EE/TC

outputs	
output 1	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	70 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

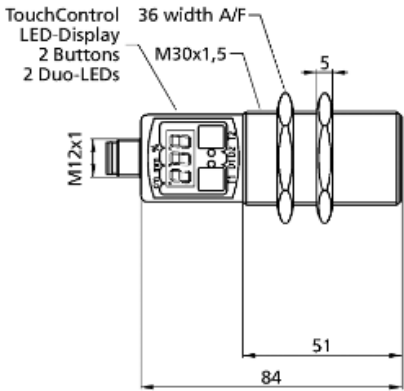
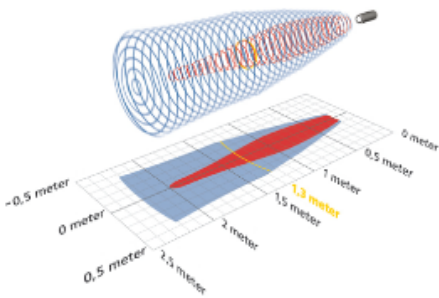
mic+130/D/TC

scale drawing	detection zone
	
 1 x pnp	 2,000 mm
operating range	200 - 1,300 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

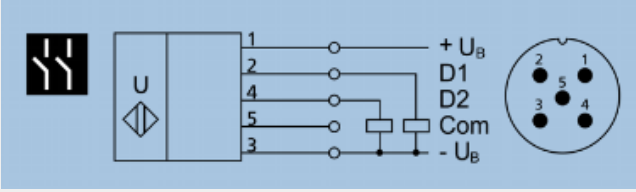
mic+130/D/TC

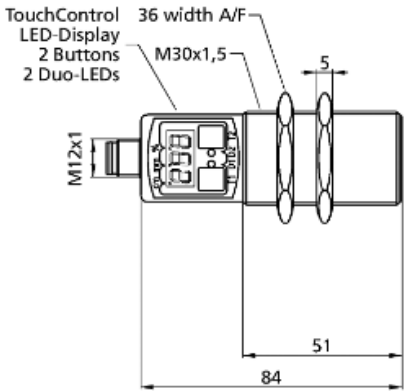
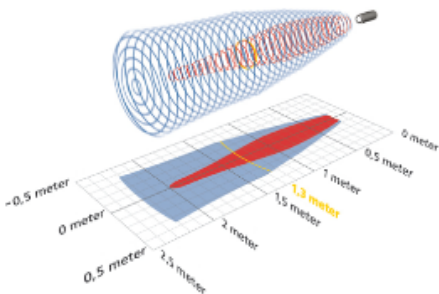
outputs	
output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	110 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+130/D/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

mic+130/DD/TC

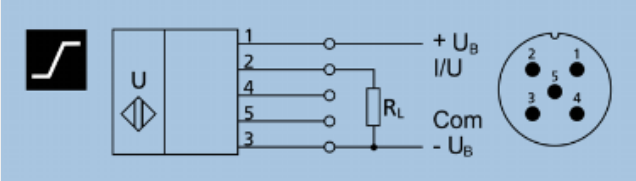
scale drawing	detection zone
	
 2 x pnp	 2,000 mm
operating range	200 - 1,300 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+130/DD/TC

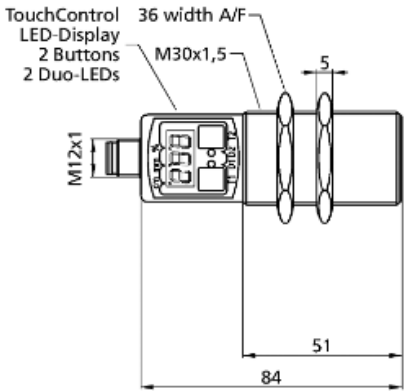
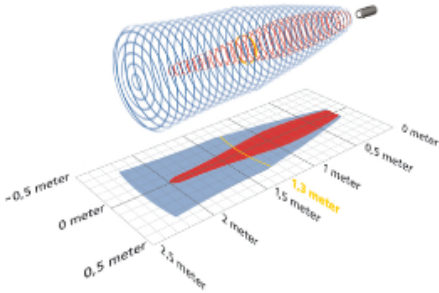
outputs	
output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	110 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel high chemical resistance cable connection (on request)
further versions	mic+130/DD/TC/E mic+130/SI/DD/TC
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

scale drawing	detection zone
	
 1 x analogue 4-20 mA + 0-10 V	 2,000 mm
operating range	200 - 1,300 mm
design	cylindrical M30
operating mode	analogue distance measurements
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm to 0.57 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U _B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

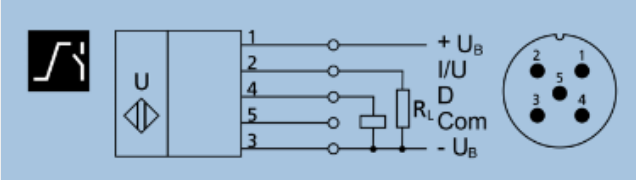
mic+130/IU/TC

outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B = 15$ V), short-circuit-proof switchable rising/falling
response time	110 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+130/IU/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

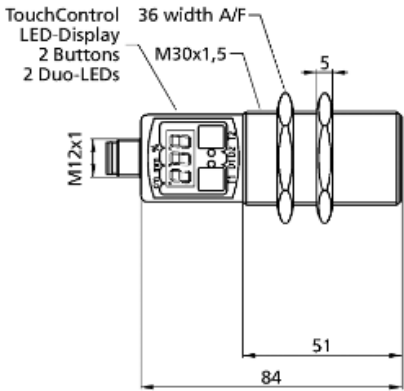
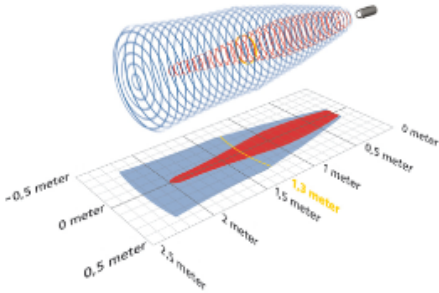
mic+130/DIU/TC

scale drawing	detection zone
	
 1 x pnp + 1 x analogue 4-20 mA / 0-10 V	 2,000 mm
operating range	200 - 1,300 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm to 0.57 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

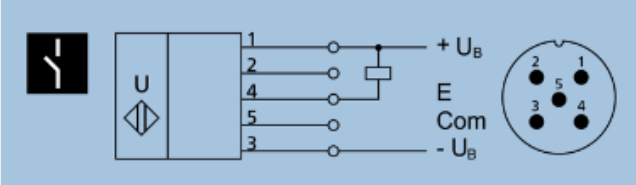
mic+130/DIU/TC

outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B = 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ($U_B - 2$ V) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	110 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+130/DIU/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

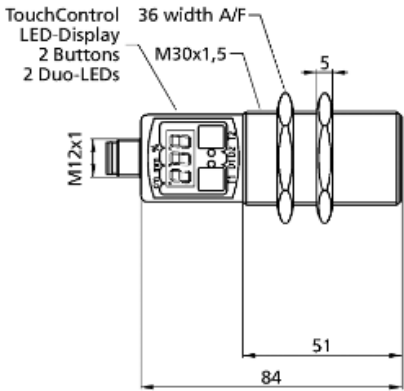
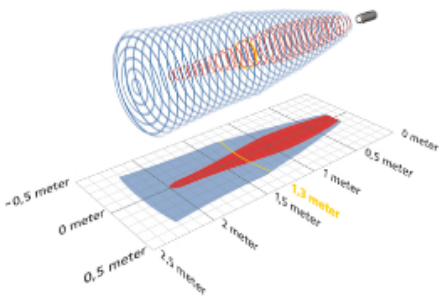
mic+130/E/TC

scale drawing	detection zone
	
 1 x npn	 2,000 mm
operating range	200 - 1,300 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

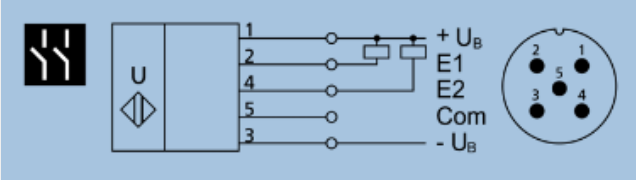
mic+130/E/TC

outputs	
output 1	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	110 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

mic+130/EE/TC

scale drawing	detection zone
	
 2 x npn	 2,000 mm
operating range	200 - 1,300 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

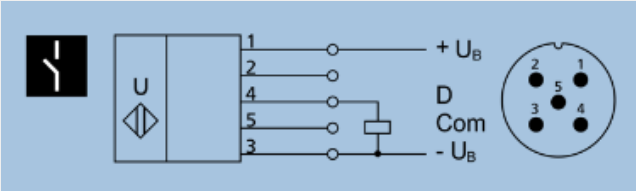
mic+130/EE/TC

outputs	
output 1	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	110 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

mic+340/D/TC

scale drawing	detection zone
 1 x pnp	 5,000 mm
operating range	350 - 3,400 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U _B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+340/D/TC

outputs	
output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	165 g
further versions	stainless steel cable connection (on request)
further versions	mic+340/D/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

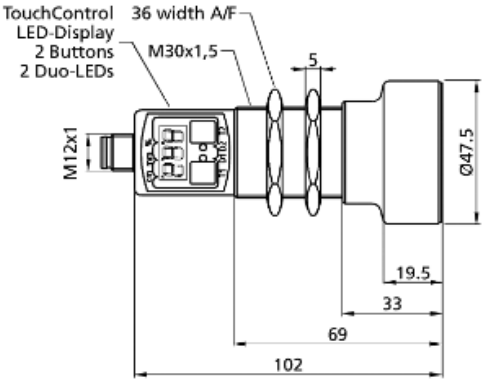
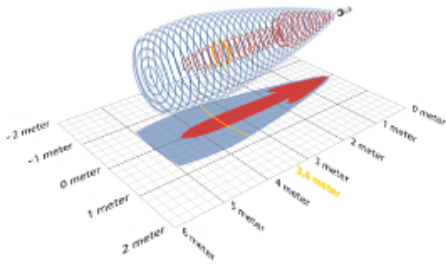
mic+340/DD/TC

scale drawing	detection zone
 2 x pnp	 5,000 mm
operating range	350 - 3,400 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U _B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+340/DD/TC

outputs	
output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	165 g
further versions	stainless steel cable connection (on request)
further versions	mic+340/DD/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

mic+340/IU/TC

scale drawing	detection zone
	
 1 x analogue 4-20 mA + 0-10 V	 5,000 mm
operating range	350 - 3,400 mm
design	cylindrical M30
operating mode	analogue distance measurements
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm to 1.5 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

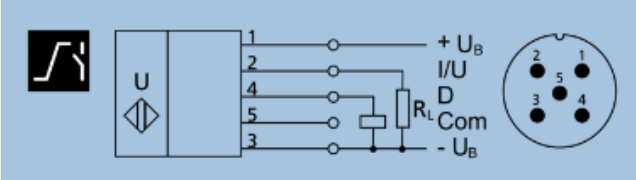
mic+340/IU/TC

outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B = 15$ V), short-circuit-proof switchable rising/falling
response time	180 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	165 g
further versions	stainless steel high chemical resistance cable connection (on request)
further versions	mic+340/IU/TC/E mic+340/Sl/IU/TC
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

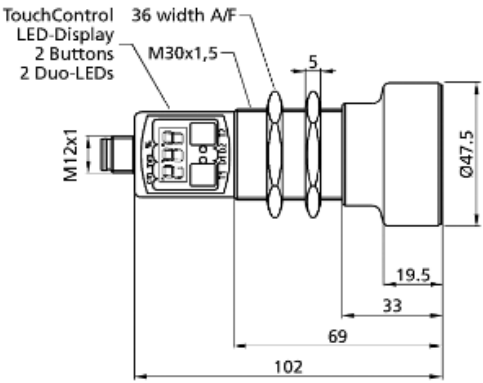
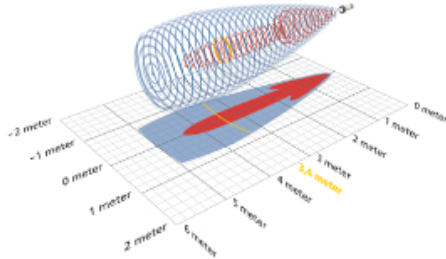
mic+340/DIU/TC

scale drawing	detection zone
1 x pnp + 1 x analogue 4-20 mA / 0-10 V	5,000 mm
operating range	350 - 3,400 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm to 1.5 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+340/DIU/TC

outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B = 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ($U_B - 2$ V) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	165 g
further versions	stainless steel cable connection (on request)
further versions	mic+340/DIU/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

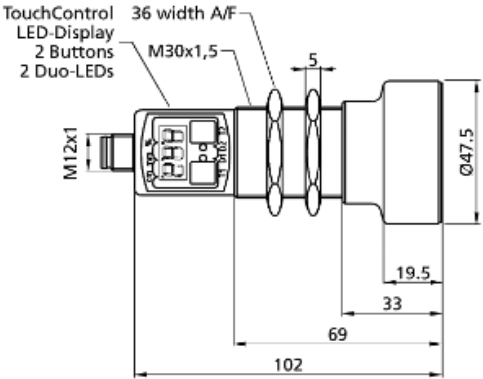
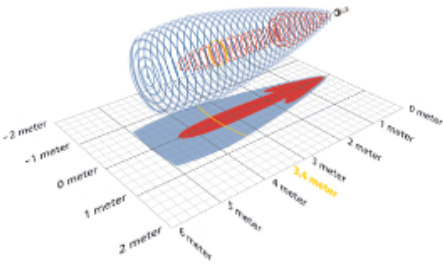
mic+340/E/TC

scale drawing	detection zone
	
 1 x npn	 5,000 mm
operating range	350 - 3,400 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U _B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

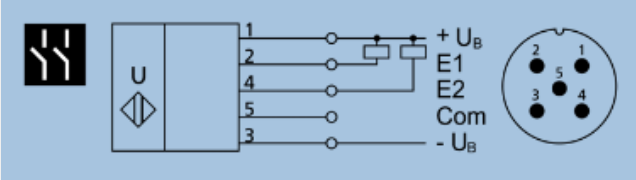
mic+340/E/TC

outputs	
output 1	switching output npn: $I_{max} = 200\text{ mA}$ ($-U_B+2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	165 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

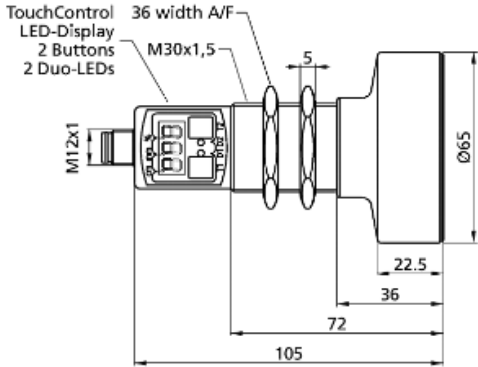
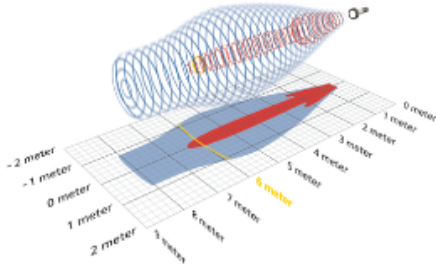
mic+340/EE/TC

scale drawing	detection zone
	
 2 x npn	 5,000 mm
operating range	350 - 3,400 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U _B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

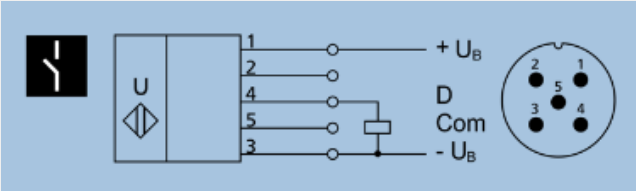
mic+340/EE/TC

outputs	
output 1	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	165 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

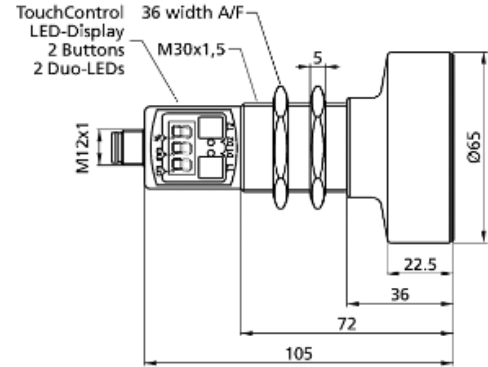
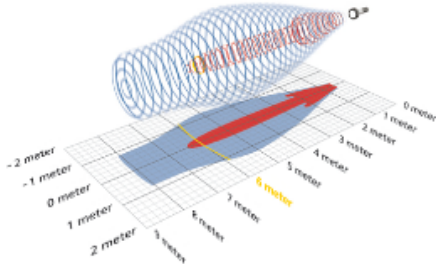
mic+600/D/TC

scale drawing	detection zone
	
 1 x pnp	 8,000 mm
operating range	600 - 6,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U _B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

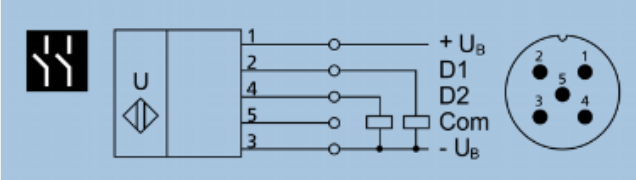
mic+600/D/TC

outputs	
output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	230 g
further versions	stainless steel cable connection (on request)
further versions	mic+600/D/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

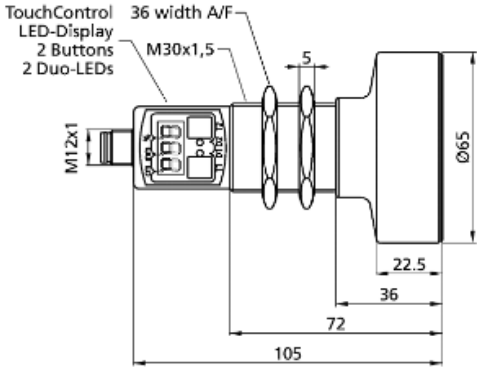
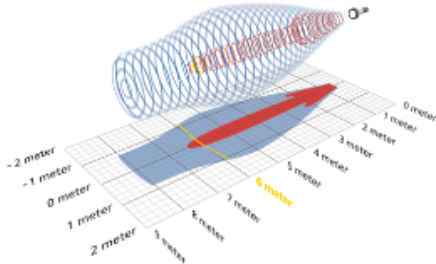
mic+600/DD/TC

scale drawing	detection zone
	
 2 x pnp	 8,000 mm
operating range	600 - 6,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

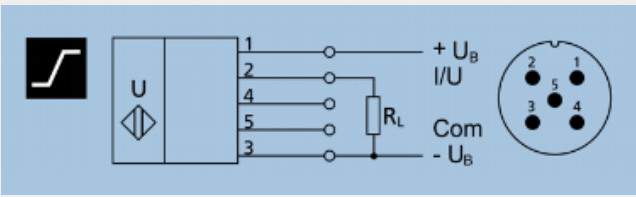
mic+600/DD/TC

outputs	
output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	230 g
further versions	stainless steel cable connection (on request)
further versions	mic+600/DD/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

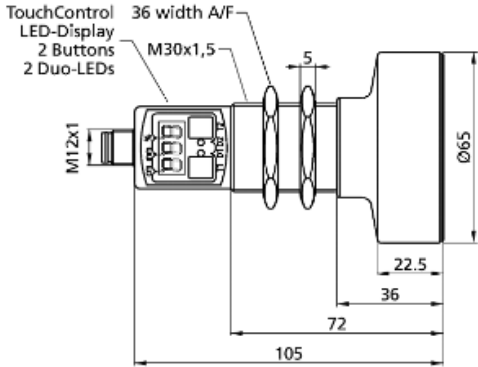
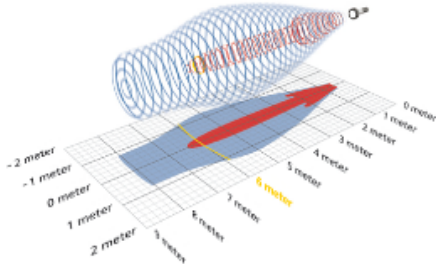
mic+600/IU/TC

scale drawing	detection zone
	
 1 x analogue 4-20 mA + 0-10 V	 8,000 mm
operating range	600 - 6,000 mm
design	cylindrical M30
operating mode	analogue distance measurements
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm to 2.4 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

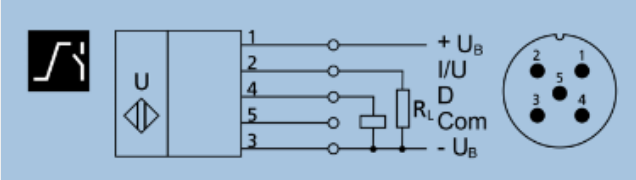
mic+600/IU/TC

outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B = 15$ V), short-circuit-proof switchable rising/falling
response time	240 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	230 g
further versions	stainless steel high chemical resistance cable connection (on request)
further versions	mic+600/IU/TC/E mic+600/Sl/IU/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

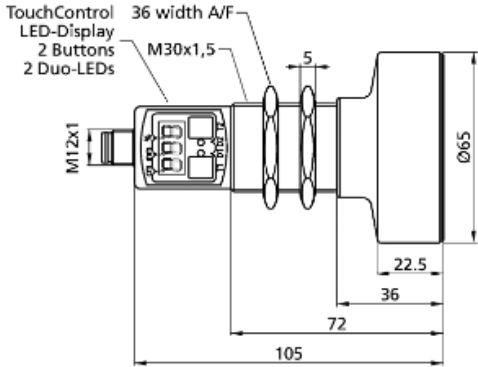
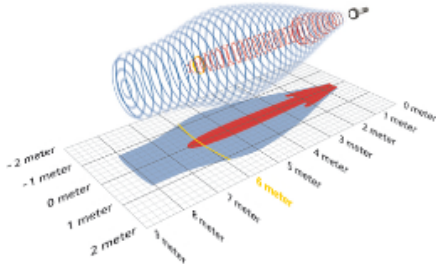
mic+600/DIU/TC

scale drawing	detection zone
	
 1 x pnp + 1 x analogue 4-20 mA / 0-10 V	 8,000 mm
operating range	600 - 6,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm to 2.4 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U _B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+600/DIU/TC

outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B = 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ($U_B - 2$ V) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	230 g
further versions	stainless steel cable connection (on request)
further versions	mic+600/DIU/TC/E
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

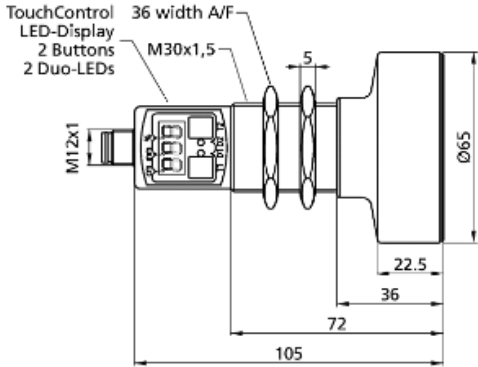
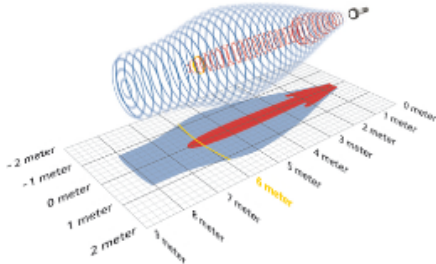
mic+600/E/TC

scale drawing	detection zone
	
 1 x npn	 8,000 mm
operating range	600 - 6,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+600/E/TC

outputs	
output 1	switching output npn: $I_{max} = 200\text{ mA}$ ($-U_B+2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	230 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	

mic+600/EE/TC

scale drawing	detection zone
	
 2 x npn	 8,000 mm
operating range	600 - 6,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display
ultrasonic -specific	
means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
angle of beam spread	please see graphics detection zone
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)
electrical data	
operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	80 mA
type of connection	5-pin M12 initiator plug

mic+600/EE/TC

outputs	
output 1	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{\max} = 200 \text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 300 ms
inputs	
input 1	com input synchronisation input
housing	
material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	230 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display
documentation (download)	
pin assignment	